

NOTES:

1. PRESTRESS AND REINFORCING REQUIREMENTS ARE GENERALLY PROVIDED BY E.O.R. FINAL STRAND LOCATIONS, DEPRESS GEOMETRY ETC. SHOULD BE COORDINATED IN SHOP DRAWING PHASE.
2. REF COMMENTARY FOR RECOMMENDED CONCRETE STRENGTHS.
3. CENTROID OF BOTTOM STRAND IS GOVERNED BY COVER, REINFORCING, AND TOLERANCE REQUIREMENTS. $2\frac{1}{2}$ " IS THE RECOMMENDED MINIMUM.

SECTION PROPERTIES:

	A in ²	I in ⁴	Yt in	Yb in	W K/FT.	St in ³	Sb in ³
STANDARD UNIT	789	260,730	29.27	24.73	0.82	8,907.75	10,543.1


ISSUED:

REVISED:

AASHTO GIRDERS

SHEET:

A-IV

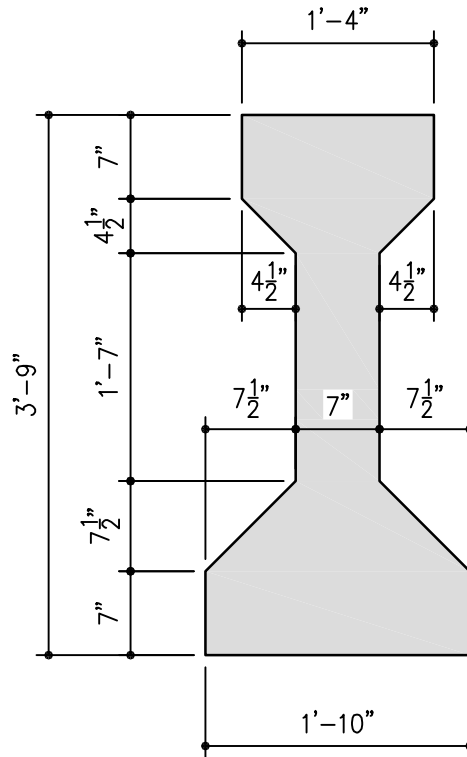

NOTES:

1. PRESTRESS AND REINFORCING REQUIREMENTS ARE GENERALLY PROVIDED BY E.O.R. FINAL STRAND LOCATIONS, DEPRESS GEOMETRY ETC. SHOULD BE COORDINATED IN SHOP DRAWING PHASE.
2. REF COMMENTARY FOR RECOMMENDED CONCRETE STRENGTHS.
3. CENTROID OF BOTTOM STRAND IS GOVERNED BY COVER, REINFORCING, AND TOLERANCE REQUIREMENTS. $2\frac{1}{2}$ " IS THE RECOMMENDED MINIMUM.

SECTION PROPERTIES:

	A in ²	I in ⁴	Y _t in	Y _b in	W K/FT.	St in ³	S _b in ³
STANDARD UNIT	560	125,390	24.73	20.27	0.583	5,070	6,186


ISSUED:

REVISED:

AASHTO GIRDERS

SHEET:

A-III

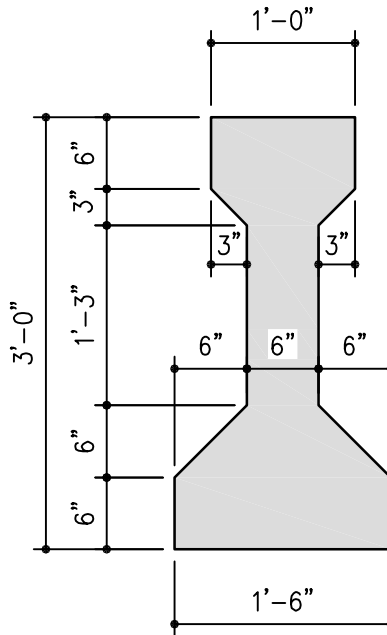

NOTES:

1. PRESTRESS AND REINFORCING REQUIREMENTS ARE GENERALLY PROVIDED BY E.O.R. FINAL STRAND LOCATIONS, DEPRESS GEOMETRY ETC. SHOULD BE COORDINATED IN SHOP DRAWING PHASE.
2. REF COMMENTARY FOR RECOMMENDED CONCRETE STRENGTHS.
3. CENTROID OF BOTTOM STRAND IS GOVERNED BY COVER, REINFORCING, AND TOLERANCE REQUIREMENTS. $2\frac{1}{2}$ " IS THE RECOMMENDED MINIMUM.

SECTION PROPERTIES:

	A in ²	I in ⁴	Yt in	Yb in	W K/FT.	St in ³	Sb in ³
STANDARD UNIT	369	50,979	20.17	15.83	0.39	2,527	3,220

ISSUED:

REVISED:

AASHTO GIRDERS

SHEET:

A-II